

Cubic Ink® High Performance 2-301

Rigid material with a good temperature form-stability and chemical resistance for final part production

Liquid Properties	Value ¹	Unit
Viscosity @ 50 °C (DIN EN ISO 3219)	31	mPa·s
Density (DIN EN ISO 15212-1)	1.11	g/mL
Surface Tension (Dynamic Bubble Pressure)	44	mN/m
Tensile Properties² (DIN EN ISO 527-5A)		
Ultimate Tensile Strength	86	MPa
Tensile Modulus	2400	MPa
Elongation at Break	3.5	%
Flexural Properties³ (DIN EN ISO 178)		
Flexural Strength	110	MPa
Flexural Modulus	2500	MPa
Deflection at Fracture	4.5	%
Impact Properties (DIN EN ISO 180)		
Izod unnotched	142	J/m
Hardness (DIN EN ISO 7619)		
Shore Hardness (green)	55 - 75	A
Shore Hardness	82	D
Thermal Properties		
HDT A (DIN EN ISO 75)	132	°C
HDT B (DIN EN ISO 75)	150	°C

Electrical Properties⁴

Dielectric strength (IEC60243-1)	22	kV/mm
Dielectric strength after 24 h/RT H ₂ O (IEC60243-1)	21	kV/mm
Relative Permittivity (Dielectric Constant, 23 °C, 1 MHz, IEC60250)	5.8	-
Dissipation Factor (24 °C, 1 MHz, IEC60250)	0.025	-
Volume Resistivity (IEC60093)	6.6 x 10 ¹⁴	Ω·cm
Volume Resistivity after 7 d/RT H ₂ O (IEC60093)	3.5 x 10 ¹⁴	Ω·cm
Comparative Tracking Index (IEC60112)	>600	V

Chemical Resistance⁵

Water Uptake, 24 h, 23 °C	0.2	%
---------------------------	-----	---

Thermal Ageing^{5,6}

160 °C for 1000 hours	<1	%
-----------------------	----	---

Ageing at -40 °C^{5,6}

for 1000 hours	5	%
----------------	---	---

Print Appearance/ Color




Natural color is translucent yellow. More colors on request.

Availability and Storage

Batch sizes starting from 1 kg.

Store at 8 °C and protect from light.

¹Properties with post-processing – washed with IPA, thermal post-cure. All material properties can vary with printer, print settings, object orientation, part geometry, post-processing and age of sample. ²5 mm/min; ³10 mm/min; ⁴Properties characterized on High Performance 2-301 VP; ⁵Properties characterized on High Performance 2-300 VP; ⁶Relative loss of tensile strength DIN EN ISO 527-5A, 5 mm/min.

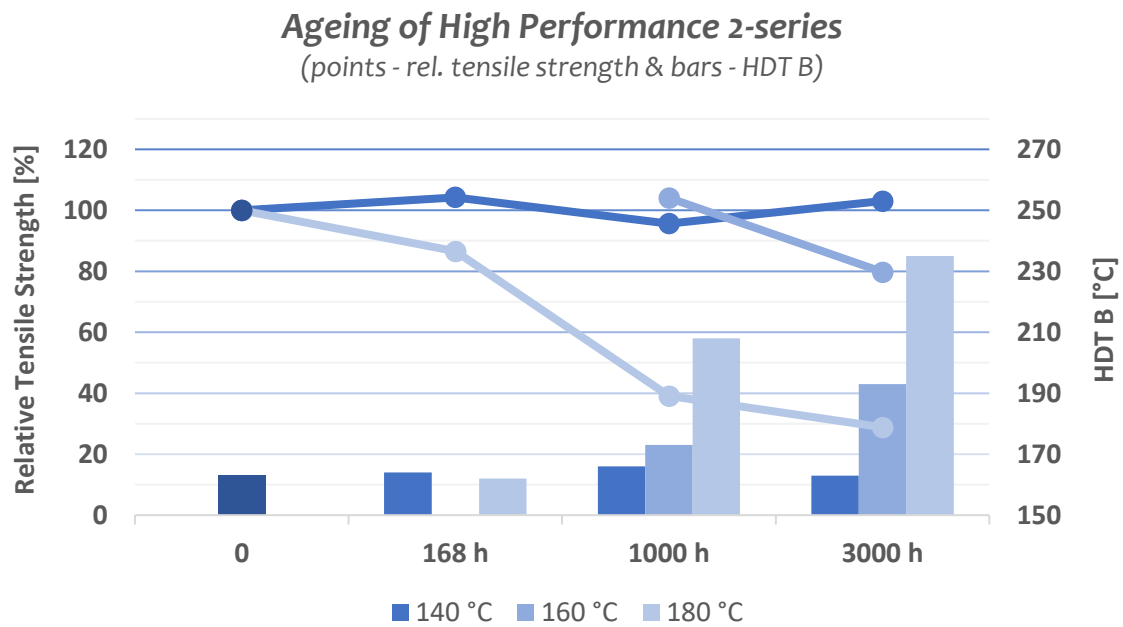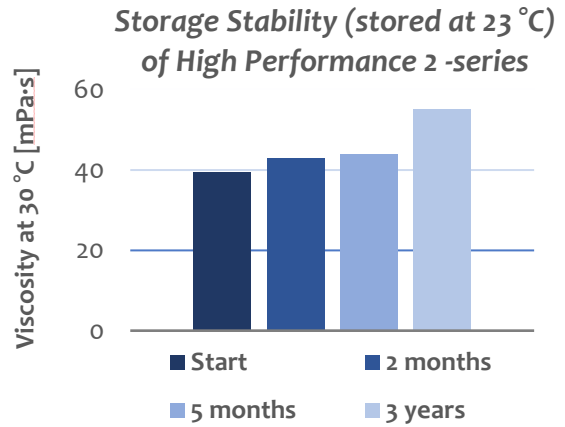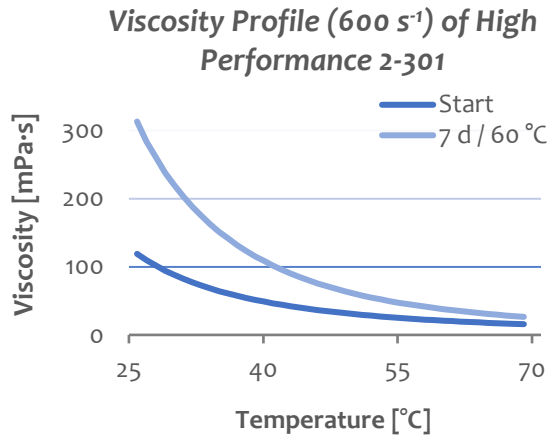

Chemical Resistance	Mass Gain [%] ¹
Water	0.2
Acetic Acid (5%)	0.2
Hydrochloric Acid (1%)	0.2
Nitric Acid (5%)	0.2
Sodium Hypochlorite (10%)	0.2
Hydrogen Peroxide (3%)	0.3
Sodium Hydroxide (1%)	0.2
Isopropyl Alcohol	0.1
Methanol	0.7
Butyl Glycol Acetate	0.1
Super Gasoline	0.1
Acetone	0.1
Methyl Ethyl Ketone	0.1

¹Percent weight gained after 24 h submersion of printed and post-cured (thermal treatment up to 160 °C) 1 x 1 x 1 cm cubes. Properties characterized on High Performance 2-300 VP.

Cubic Ink®

ACTEGA Terra GmbH

Mielestraße 13

31275 Lehrte

GERMANY

Tel +49 (0)5132 5009-600

cubic.ink@altana.com

www.altana.com

Learn more about Cubic Ink® materials www.altana.com/cubic-ink www.altana.de/cubic-ink

Disclaimer

The information contained herein is based on our current knowledge and experience. No warranties, guarantees and/or assurances of any kind, either express or implied, including warranties of merchantability or fitness for a particular purpose, are made regarding any products mentioned herein and data or information set forth, or that such products, data or information may be used without infringing intellectual property rights of third parties. Any information about suitability, use or application of the products is non-binding and does not constitute a commitment regarding the products' properties, use or application. Contractual terms and conditions, in particular agreed product specifications, always take precedence. We recommend that you test our products in preliminary trials to determine their suitability for your intended purpose prior to use. We reserve the right to make any changes and to update the information herein without notice.

Follow us – ALTANA New Technologies GmbH – Cubic Ink®

