

Cubic Ink® High Performance 1-202 VP

High temperature form-stable material for final part production

Liquid Properties	Value ¹	Unit
Viscosity @ 25 °C (DIN EN ISO 3219)	77	mPa·s
Density (DIN EN ISO 15212-1)	1.14	g/mL
Critical Energy (E _c) @405 / 385 nm	14.8 / 21.1	mJ/cm ²
Depth of Penetration (D _p) @405 / 385 nm	0.16 / 0.11	mm
Tensile Properties² (DIN EN ISO 527-5A)		
Ultimate Tensile Strength	83	MPa
Tensile Modulus	3000	MPa
Elongation at Break	3.5	%
Flexural Properties³ (DIN EN ISO 178)		
Flexural Strength	130	MPa
Flexural Modulus	3300	MPa
Deflection at Fracture	4.2	%
Impact Properties		
Izod unnotched (DIN EN ISO 180)	240	J/m
Charpy unnotched (DIN EN ISO 179-1)	24	kJ/m ²
Hardness (DIN EN ISO 7619)		
Shore Hardness (green)	60 - 80	A
Shore Hardness	85	D
Thermal Properties		
T _g (DMA) ^{4,5}	150, 230	°C

HDT A (DIN EN ISO 75)	177	°C
HDT B (DIN EN ISO 75)	195	°C
CTE (-40 °C, 115 °C) (DIN EN ISO 11359-2) ⁴	78	$\times 10^{-6} \text{ K}^{-1}$
CTE (115 °C, 200 °C) (DIN EN ISO 11359-2) ⁴	231	$\times 10^{-6} \text{ K}^{-1}$
Specific Heat Capacity, 20 °C (DIN EN ISO 11357-4) ⁴	1.3	J/(g·K)

Electrical Properties⁴

Dielectric strength (IEC60243-1)	27	kV/mm
Relative Permittivity (Dielectric Constant, 22 °C, 0.1 MHz, IEC60250)	4.1	-
Dissipation Factor (22 °C, 0.1 MHz, IEC60250)	0.0039	-
Volume Resistivity (IEC60093)	6.4×10^{14}	$\Omega \cdot \text{cm}$
Volume Resistivity after 7 d/RT H ₂ O (IEC60093)	9.3×10^{14}	$\Omega \cdot \text{cm}$
Comparative Tracking Index (IEC60112)	125	V

Flame (UL94)

Flammability, horizontal (at 4.0 mm)	HB	-
--------------------------------------	----	---

Chemical Resistance⁴

Water Uptake, 24 h, 23 °C	1.2	%
Performance after Water Uptake, 24 h, 23 °C ⁶	<3	%

Thermal Ageing^{4,6}

120 °C for 1500 hours	<5	%
-----------------------	----	---

Print Appearance/ Color




Natural color is brown. Also available in black.

Availability and Storage

Batch sizes starting from 1 kg.

Store at 8 °C and protect from light.

¹Properties with post-processing – washed with IPA, thermal post-cure. All material properties can vary with printer, print settings, object orientation, part geometry, post-processing and age of sample. ²5 mm/min; ³10 mm/min; ⁴Properties characterized on High Performance 1-301 VP; ⁵Shear-experiment 3 μm , 1 Hz, -40 - 320 °C, 3 K/min, $\tan \delta$; ⁶Relative loss of tensile strength compared to reference, DIN EN ISO 527-5A, 5 mm/min.

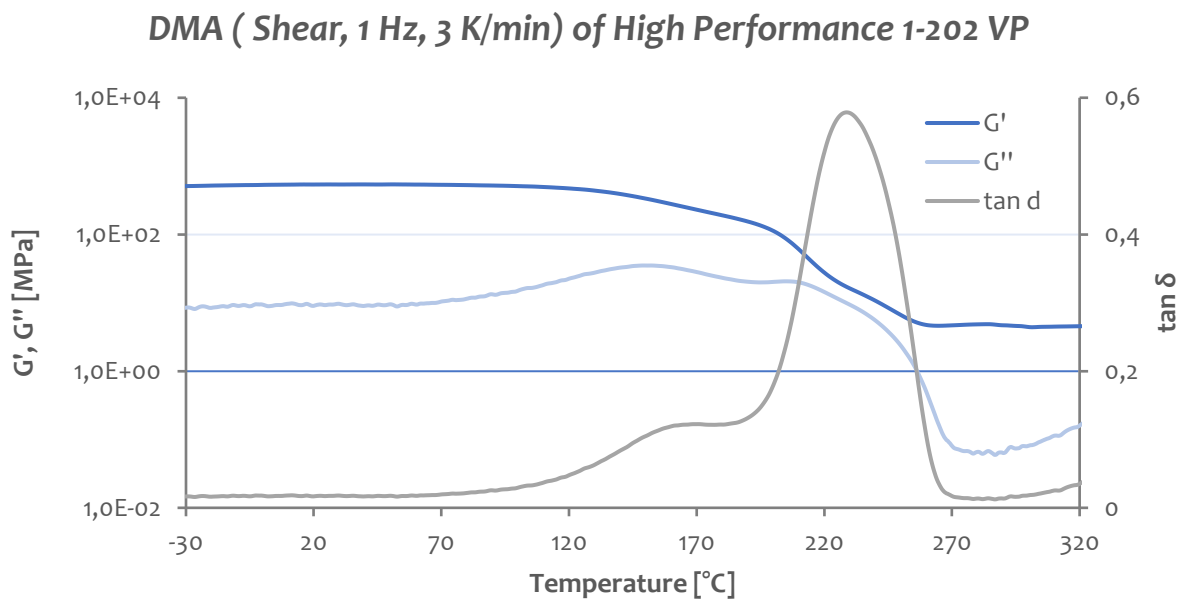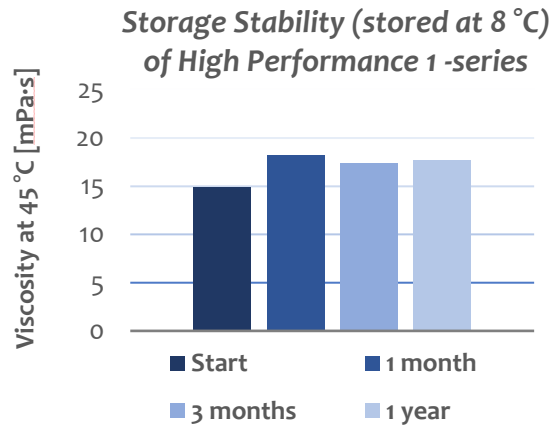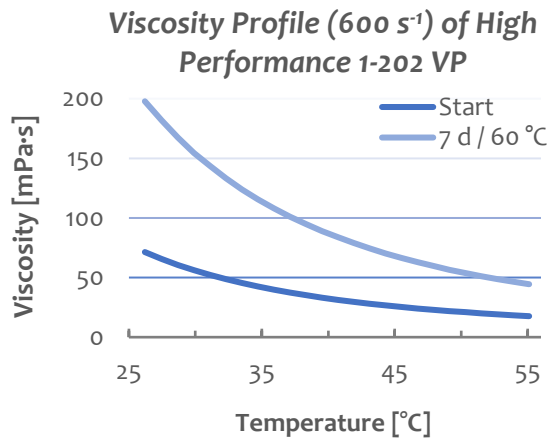

Cubic Ink®
ACTEGA Terra GmbH
Mielestraße 13
31275 Lehrte
GERMANY

Tel +49 (0)5132 5009-600

cubic.ink@altana.com

www.altana.com

Learn more about Cubic Ink® materials www.altana.com/cubic-ink www.altana.de/cubic-ink

Disclaimer

The information contained herein is based on our current knowledge and experience. No warranties, guarantees and/or assurances of any kind, either express or implied, including warranties of merchantability or fitness for a particular purpose, are made regarding any products mentioned herein and data or information set forth, or that such products, data or information may be used without infringing intellectual property rights of third parties. Any information about suitability, use or application of the products is non-binding and does not constitute a commitment regarding the products' properties, use or application. Contractual terms and conditions, in particular agreed product specifications, always take precedence. We recommend that you test our products in preliminary trials to determine their suitability for your intended purpose prior to use. We reserve the right to make any changes and to update the information herein without notice.

Follow us – ALTANA New Technologies GmbH – Cubic Ink®

