

## Cubic Ink® High Performance 4-2100 VP

Highly impact resistant and flexible material with good toughness for final part production

Liquid Properties	Value <sup>1</sup>	Unit
Viscosity @ 25 °C (DIN EN ISO 3219)	25	mPa·s
Density (DIN EN ISO 15212-1)	1.10	g/mL
Critical Energy (E <sub>c</sub> ) @405 / 385 nm	2.4 / 2.3	mJ/cm <sup>2</sup>
Depth of Penetration (D <sub>p</sub> ) @405 / 385 nm	0.28 / 0.20	mm
<b>Tensile Properties<sup>2</sup> (DIN EN ISO 527-5A)</b>		
Ultimate Tensile Strength	48	MPa
Yield Strength	48	MPa
Tensile Modulus	2200	MPa
Elongation at Break	37	%
<b>Flexural Properties<sup>3</sup> (DIN EN ISO 178)</b>		
Flexural Strength	64	MPa
Flexural Modulus	1600	MPa
Deflection at Fracture	>10	%
<b>Impact Properties</b>		
Izod notched (DIN EN ISO 180)	67	J/m
Charpy notched (DIN EN ISO 179-1)	9.9	kJ/m <sup>2</sup>
Izod unnotched (DIN EN ISO 180)	670	J/m
Charpy unnotched (DIN EN ISO 179-1)	110	kJ/m <sup>2</sup>

### Hardness (DIN EN ISO 7619)

Shore Hardness (green)	40 - 45	D
Shore Hardness	77	D

### Thermal Properties

T <sub>g</sub> (TMA) <sup>4</sup>	90	°C
HDT A (DIN EN ISO 75)	49	°C
HDT B (DIN EN ISO 75)	76	°C
CTE (-50 °C, 70 °C) (DIN EN ISO 11359-2)	94	x 10 <sup>-6</sup> K <sup>-1</sup>
CTE (120 °C, 200 °C) (DIN EN ISO 11359-2)	113	x 10 <sup>-6</sup> K <sup>-1</sup>
Specific Heat Capacity, 20 °C (DIN EN ISO 11357-4)	1.7	J/(g·K)

### Electrical Properties

Dielectric strength (IEC60243-1)	22	kV/mm
Relative Permittivity (Dielectric Constant, 21 °C, 10000 Hz, IEC60250)	8.9	-
Dissipation Factor (21 °C, 10000 Hz, IEC60250)	0.016	-
Volume Resistivity (IEC60093)	1.5 x 10 <sup>14</sup>	Ω·cm
Comparative Tracking Index (IEC60112)	>600	V

### Flame (UL94)

Flammability, horizontal (at 3.2 mm)	HB	-
--------------------------------------	----	---

### Chemical Resistance

Water Uptake, 168 h, 23 °C <sup>5</sup>	6.4	%
Performance after Water Uptake, 30 min, 90 °C <sup>6</sup>	28	%

### Thermal Ageing<sup>7</sup>

125 °C for 168 hours	<1	%
----------------------	----	---

### Ageing at -40 °C<sup>6</sup>

for 168 hours	<1	%
---------------	----	---

### Print Appearance/ Color

Natural color is translucent light yellow. Also available in cyan, magenta, yellow, black and grey. More colors on request.


## Availability and Storage

Batch sizes starting from 1 kg.

Store between 21 and 28 °C and protect from light. Stir prior to use.


<sup>1</sup>Properties with post-processing – washed with water, UV post-cure. All material properties can vary with printer, print settings, object orientation, part geometry, post-processing and age of sample. <sup>2</sup>5 mm/min; <sup>3</sup>5 mm/min; <sup>4</sup>-20 - 200 °C, 5 K/min, TMA; <sup>5</sup>Weight loss of 5A-specimen DIN EN ISO 527; <sup>6</sup>Relative loss of tensile strength compared to reference, DIN EN ISO 527-5A, 5 mm/min; <sup>7</sup>Relative loss of elongation at break compared to reference, DIN EN ISO 527-5A, 5 mm/min.

## Versatility and Customization of High Performance 4-Series

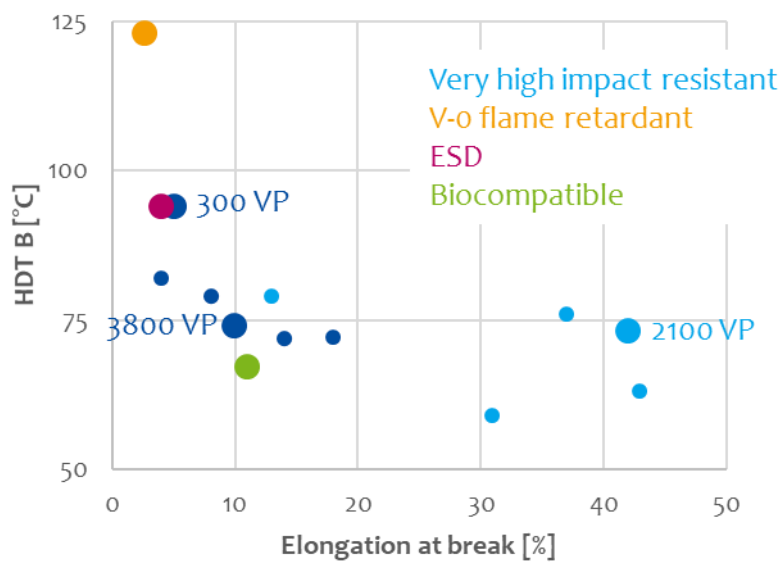


## Ageing of High Performance 4-2100 VP

(points - tensile strength & bars - elongation at break)

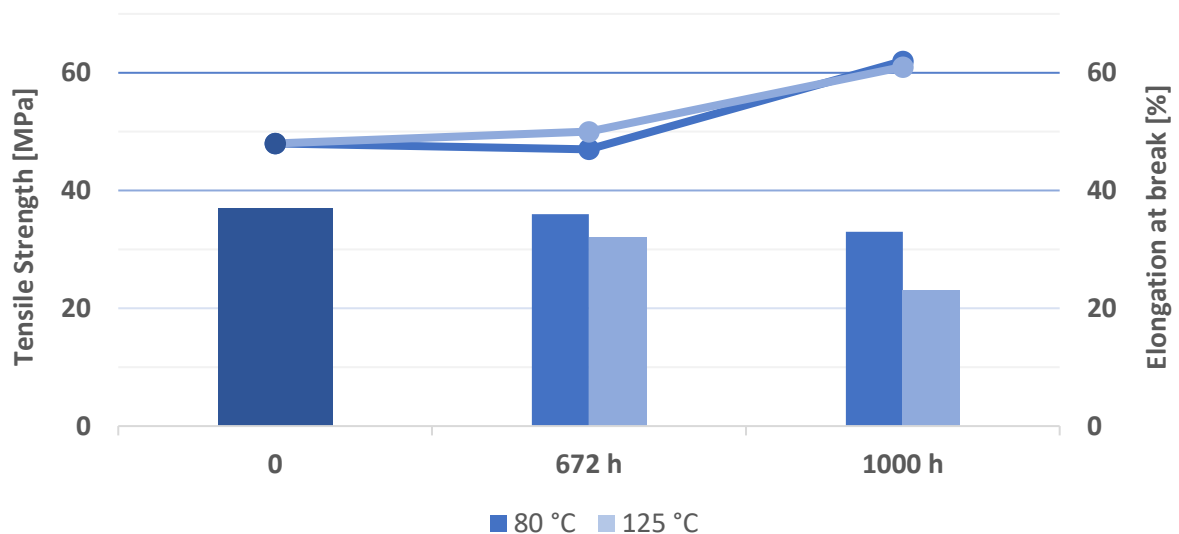

### Tensile Testing of High Performance 4-2100 VP

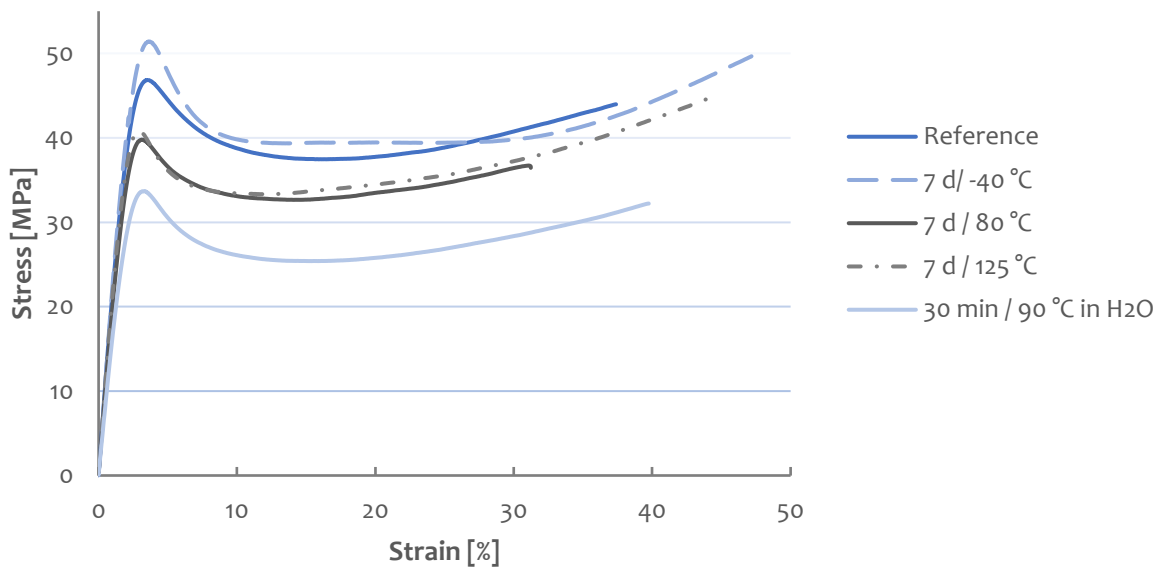

Chemical Resistance	Mass Gain [%] <sup>1</sup>
Water	4.9
Acetic Acid (5%)	5.8
Hydrochloric Acid (1%)	11.2
Nitric Acid (5%)	8.4
Sodium Hypochlorite (10%)	0.4
Hydrogen Peroxide (3%)	5.8
Sodium Hydroxide (1%)	4.1
Isopropyl Alcohol	0.3
Methanol	10.9
Butyl Glycol Acetate	-0.2
Super Gasoline	1.6
Acetone	12.4
Methyl Ethyl Ketone	8.4

<sup>1</sup>Percental weight gained after 24 h submersion of printed and post-cured (washed with water, UV post-cure) 1 x 1 x 1 cm cubes.

**Cubic Ink®**  
**ACTEGA Terra GmbH**  
Mielestraße 13  
31275 Lehrte  
GERMANY

Tel +49 (0)5132 5009-600

[cubic.ink@altana.com](mailto:cubic.ink@altana.com)  
[www.altana.com](http://www.altana.com)

**Learn more about Cubic Ink® materials** [www.altana.com/cubic-ink](http://www.altana.com/cubic-ink) [www.altana.de/cubic-ink](http://www.altana.de/cubic-ink)

#### Disclaimer

The information contained herein is based on our current knowledge and experience. No warranties, guarantees and/or assurances of any kind, either express or implied, including warranties of merchantability or fitness for a particular purpose, are made regarding any products mentioned herein and data or information set forth, or that such products, data or information may be used without infringing intellectual property rights of third parties. Any information about suitability, use or application of the products is non-binding and does not constitute a commitment regarding the products' properties, use or application. Contractual terms and conditions, in particular agreed product specifications, always take precedence. We recommend that you test our products in preliminary trials to determine their suitability for your intended purpose prior to use. We reserve the right to make any changes and to update the information herein without notice.

**Follow us – ALTANA New Technologies GmbH – Cubic Ink®**

